



H24 Back Panel Replacement

Remove the Existing H24 Back Panel and Install the new Back Panel

1. Using a 3/8" nut driver, remove the 4 nuts on the existing H24 back panel. Lift from bolts and set aside.

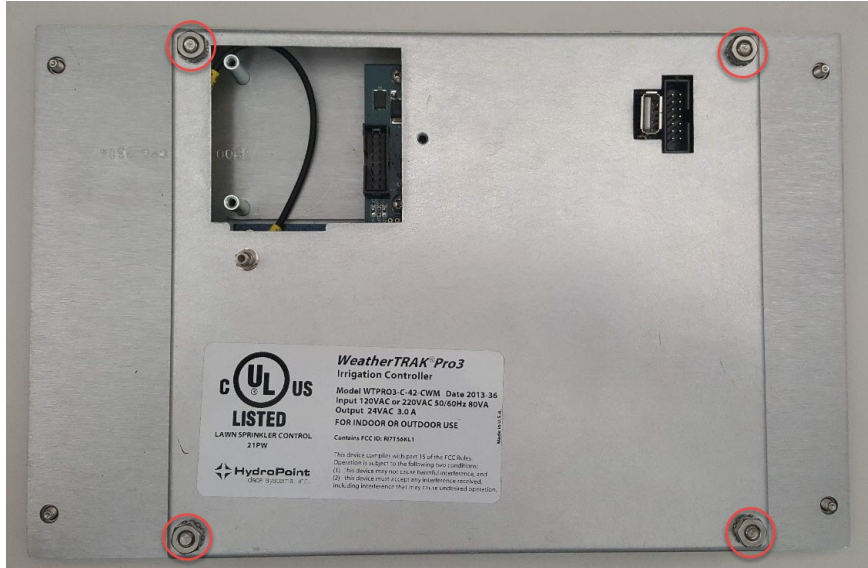

2. Place the new back panel onto the front plate in the orientation shown.

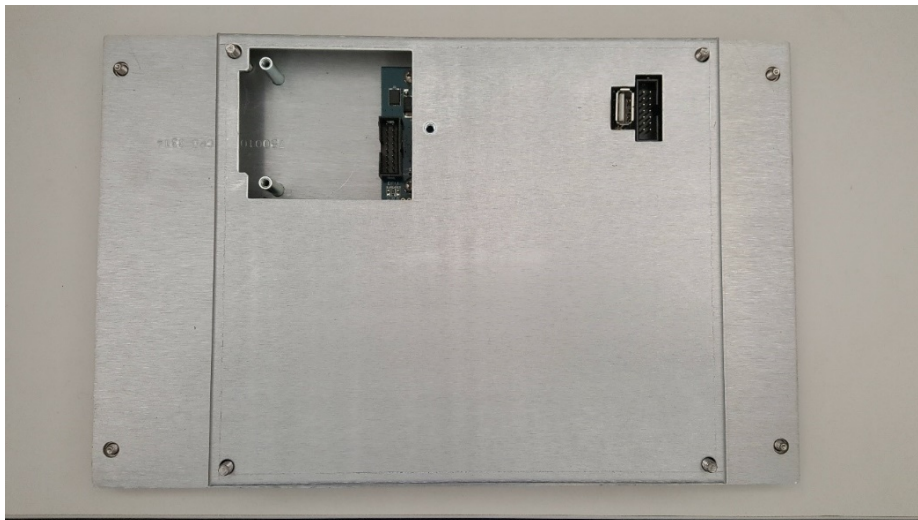

3. Use the nut driver to attach the four nuts onto the panel.